


SOCKET, STRAIGHT STYLE FC, FD, FS, FW *STYLE SC, SD, SS, SW

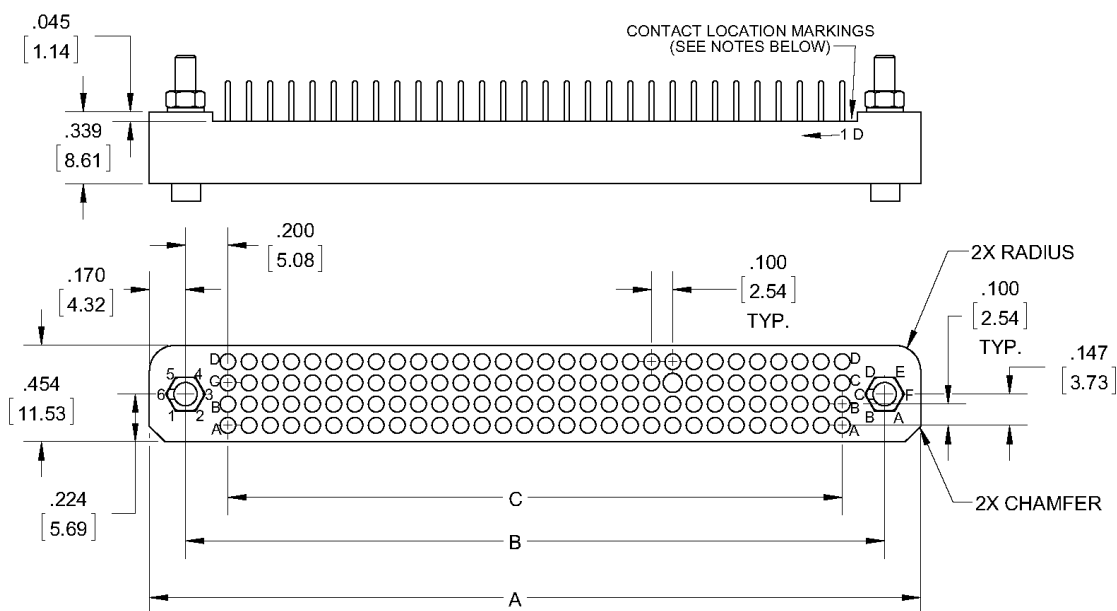

No. of Contacts	A	B	C
48	1.840 [46.74]	1.500 [38.10]	1.100 [27.94]
68	2.340 [59.44]	2.000 [50.80]	1.600 [40.64]
80	2.640 [67.06]	2.300 [58.42]	1.900 [48.26]
96	3.040 [77.22]	2.700 [68.58]	2.300 [58.42]
100	3.140 [79.76]	2.800 [71.12]	2.400 [60.96]
108	3.340 [84.84]	3.000 [76.20]	2.600 [66.04]
120	3.640 [92.46]	3.300 [83.82]	2.900 [73.66]
128	3.840 [97.54]	3.500 [88.90]	3.100 [78.74]
136	4.040 [102.62]	3.700 [93.98]	3.300 [83.82]
160	4.640 [117.86]	4.300 [109.22]	3.900 [99.06]
184	5.240 [133.10]	4.900 [124.46]	4.500 [114.30]
196	5.540 [140.72]	5.200 [132.08]	4.800 [121.92]

*CONTACT LOCATION MARKING NOTES

- PLUG (STYLE S) HAS MARKINGS ON CHAMFER SIDE
- RECEPTACLE (STYLE F) HAS MARKINGS ON RADIUS SIDE
- FOR REVERSE SEE ORDERING CHART

REFER TO APPENDIX FOR TERMINATION DETAILS,
HARDWARE STYLES, AND PWB PATTERNS