


PLUG, STRAIGHT, LOW PROFILE STYLE RBE, RDE, RSE

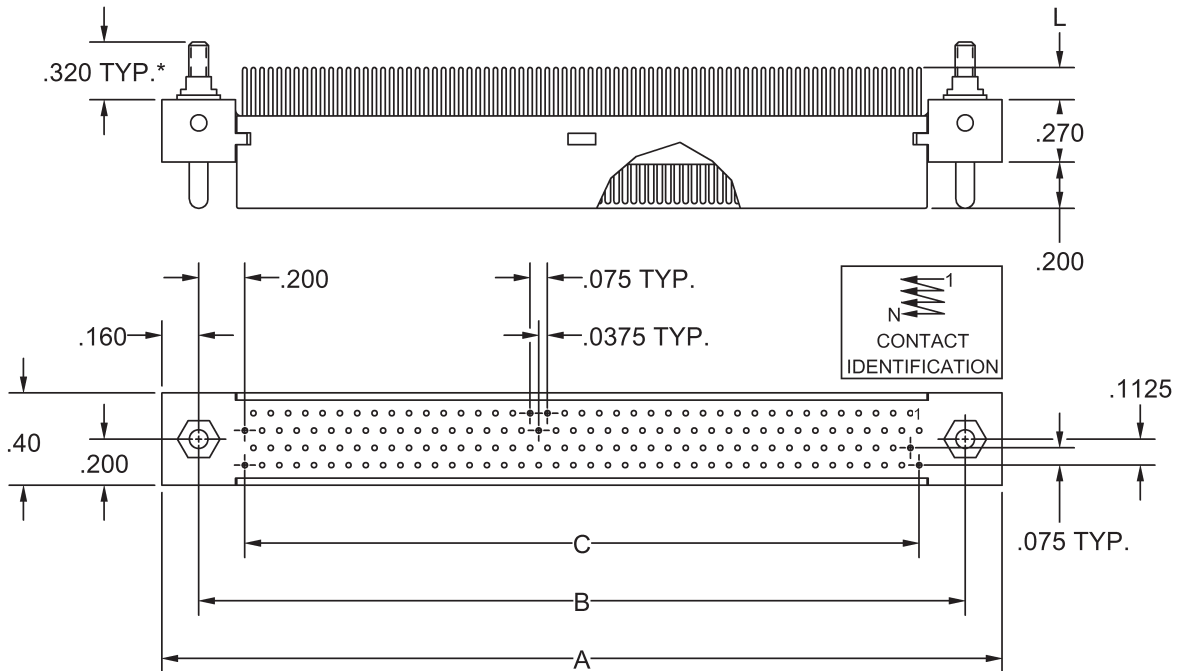

SIZE	A	B	C
058	1.770	1.450	1.050
062	1.845	1.525	1.125
066	1.920	1.600	1.200
070	1.995	1.675	1.275
074	2.070	1.750	1.350
078	2.145	1.825	1.425
082	2.220	1.900	1.500
086	2.295	1.975	1.575
090	2.370	2.050	1.650
094	2.445	2.125	1.725
098	2.520	2.200	1.800
102	2.595	2.275	1.875
106	2.670	2.350	1.950

SIZE	A	B	C
110	2.745	2.425	2.025
114	2.820	2.500	2.100
118	2.895	2.575	2.175
122	2.970	2.650	2.250
126	3.045	2.725	2.325
130	3.120	2.800	2.400
134	3.195	2.875	2.475
138	3.270	2.950	2.550
142	3.345	3.025	2.625
146	3.420	3.100	2.700
150	3.495	3.175	2.775
154	3.570	3.250	2.850
158	3.645	3.325	2.925

***REFER TO APPENDIX FOR TERMINATION
DETAILS, HARDWARE STYLES, POLAR-
IZATION CHART, AND PWB PATTERNS**